



Carlson-Dimond & Wright
25201 Terra Industrial Drive
Suite B
Chesterfield, MI 48051
(586) 949-5474
(586) 949-4041 Fax
www.cdwdrives.com
sales@cdwdrives.com

System Components Product Features:

Increased Strength,
Durability and Service Life

Improved Performance

Lower Total Coupling
Costs

**Call CDWdrives to
Service, Repair,
Refurbish, Replace,
Retrofit and/or Reverse
Engineer your systems.**



Providing Superior Quality Components
for Power Transmission Applications
ISO 9001:2008 Registered

Custom & Standard Flanged, Sleeve & Elastomeric Couplings

**Applications include: Oil Well Pumps,
Hydraulic Pumps, Printing Presses, Textile
Machinery, Compressors, Mixers, Cranes,
Winches and many more.**

POWERTORK Series "F" Flange Type Gear Couplings

Flanged couplings include full flex, flex rigid & rigid-rigid couplings in stock sizes from 1-F through 10-F for bore sizes up to 14-1/8" diameter. Custom sizes are available up to 30-F for bore sizes up to 46" diameter.



POWERTORK Series "S" Sleeve Type Gear Couplings

Continuous sleeve couplings include full flex and flex rigid couplings in stock sizes from 6-S through 45-S. Non Stock couplings can be provided for bore sizes up to 15". Single piece sleeve couplings feature two hubs with crowned gear teeth.




POWERTORK Series "EL" Elastomeric Couplings



Wedgegard Torque Limiter

A different solution for overload protection.

Based on a wedge shaped pin, this overload system is a completely new concept in shearpin protection.

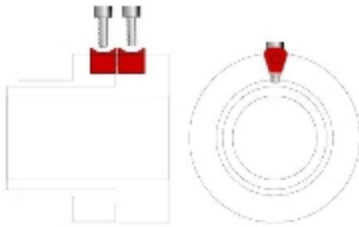

Our Elastomeric Couplings are designed to be a "drop out" element coupling, require no lubrication, cushion shock loads, dampen torsional vibration & are electrically insulated. Operating temperature range from -30 to +200 degrees F.



Call CDWdrives now for additional information

or to receive a quotation

(586) 949-5474

www.cdwdrives.com

sales@cdwdrives.com